

Current Sensor

Product Series: SHK-VBS2

Part number: SHK-545VBS2/D

Version: Ver 1.1



Sinomags Technology Co., Ltd

网址: www.sinomags.com

CONTENT

1. Description	2
2. Electrical data	3
3. Step response time	4
4. Dimensions & Pins & Footprint	4
5. Install it on the PCB	5
6. Product repair and test schematic	5
Appendix: Recommended applications of sensors	6

1. Description

SHK-VBS2 series current sensor is a new generation of current sensor based on the open-loop principle, which can measure DC, AC, pulse and various irregular waveforms of current under isolated conditions.

Typical applications

- AC Variable speed drives
- DC motor
- UPS power supply
- Communication power source
- Inverter

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T _A	°C	-40 ~ 125
Storage temperature	T _{stg}	°C	-40 ~ 125
Mass	m	g	60

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _C	V	6
ESD rating (HBM)	U _{ESD}	kV	4

Remark : the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	4	
Shell material			V0 according to UL 94	

2. Electrical data

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal current	I_{pn}	A		545		
Primary current measuring range	I_{pm}	A	-1090		1090	
Supply voltage	V_{CC}	V	4.75	5	5.25	
Current consumption	I_{CC}	mA		10	15	
Rated output voltage	V_{FS}	V		± 1		($V_{out} @ \pm I_{pn}$) - V_{off}
Internal output resistance	R_{out}	Ω		5		V_{out}
Quiescent voltage	V_{off}	V	2.48	2.5	2.52	$V_{out} @ 0\text{A}$
Quiescent voltage $V_{out} @ 0\text{A}$	V_{ref}	V	2.48	2.5	2.52	
Electrical offset voltage ($V_{out} - V_{ref}$) @ 0 A	V_{oe}	V	-20		20	
Theoretical gain	G_{th}	mV/A		1.83		1 V @ I_{pn}
Rated linearity error	Non-L	% I_{pn}	-1.5		1.5	$\pm I_{pn}$
Overload linearity error	Non-L	% I_{pm}	-1.5		1.5	$\pm I_{pm}$
Step response time	t_{res}	μs		3.5		@90% of I_{PN}
-3dB band width	BW	kHz		NC		Back-end non-RC circuit
Noise DC ~ 10 kHz DC ~ 100 kHz	V_{noise}	mVpp		20 38		
Accuracy @ RT	X	% of I_{pn}	-1.5		1.5	@ 25°C
Accuracy	X_{TRange}	% of I_{pn}	-3		3	$-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

Remarks:

- the accuracy @ $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, $X_{TRange} = (((V_{out} - V_{ref}) @ I_n @ T_x) - V_{oe} @ 25^{\circ}\text{C} - G_{th} * I_n) / V_{FS}$, where T_x represents present temperature, G_{th} is fitted gain at room temperature.

3. Step response time


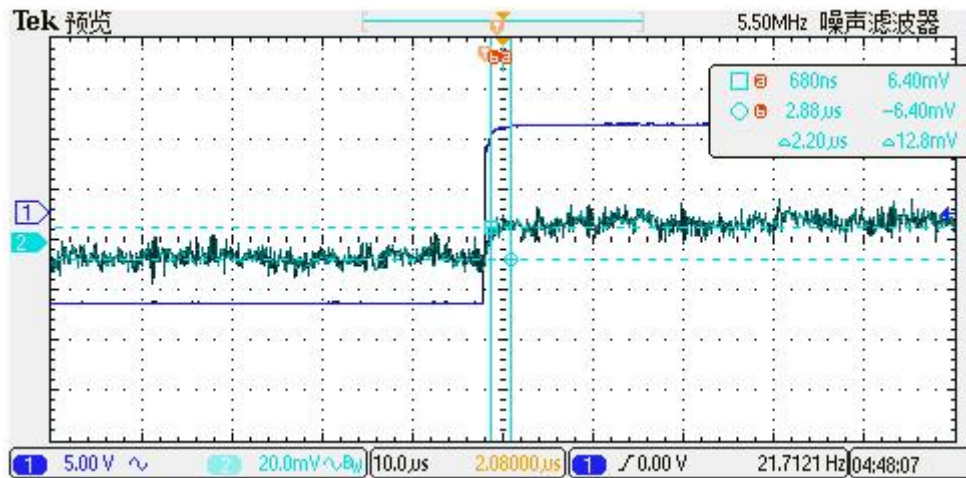



Fig.1 the step response time of SHK-VBS2 current sensors. The light blue is primary current, while the dark blue is output signal of current sensor. The step response time is less than 3.5µs.

4. Dimensions & Pins & Footprint

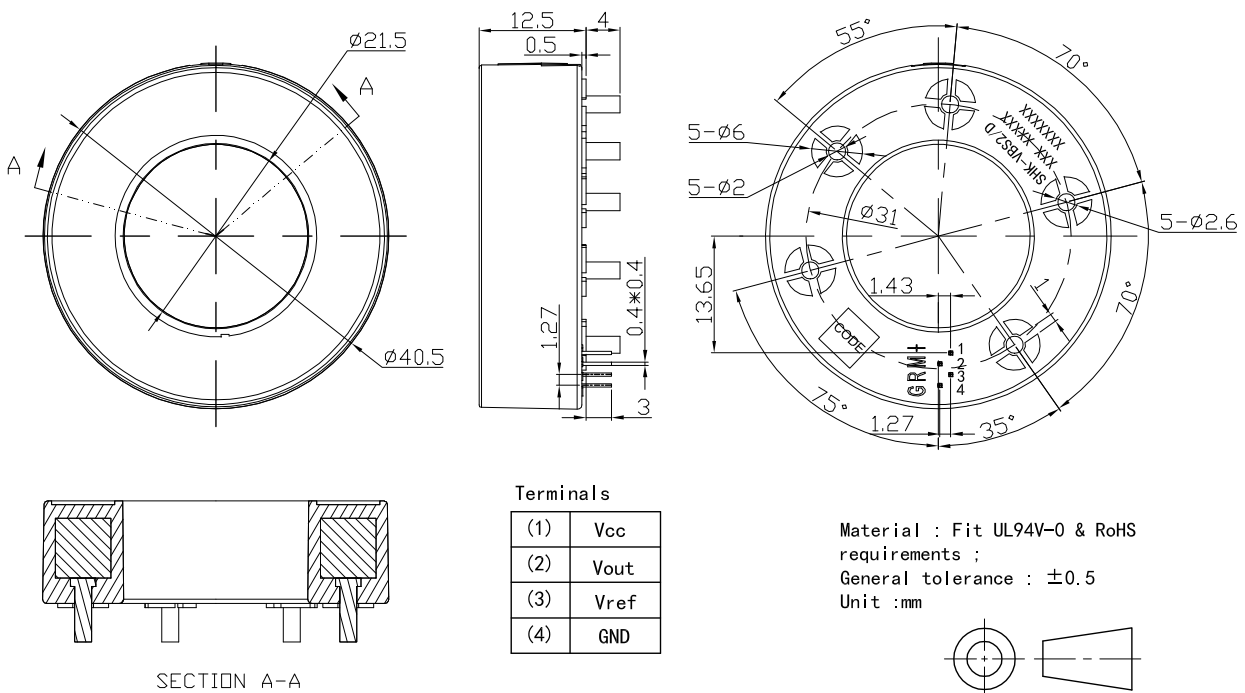


5. Install it on the PCB

Installation Angle: overlooking (view from the side where the sensor is installed, unit: mm)

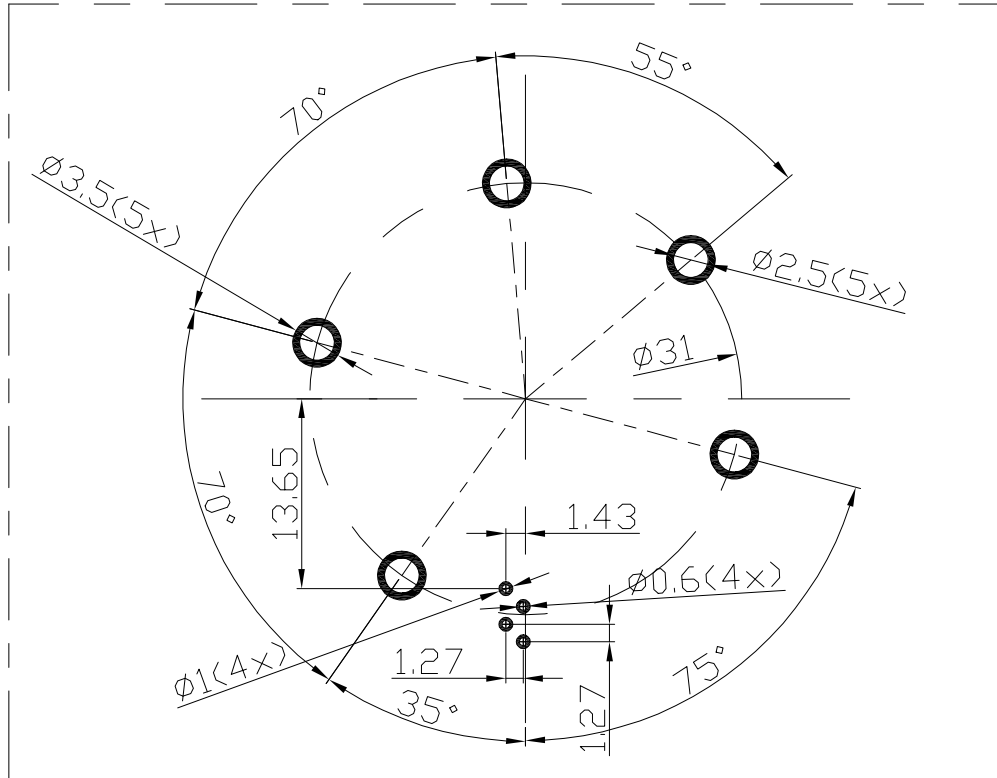


6. Product repair and test schematic

Product testing: The product is tested by passing a 21mm diameter copper rod through the sensor as the primary current line, as shown in the shaded position.

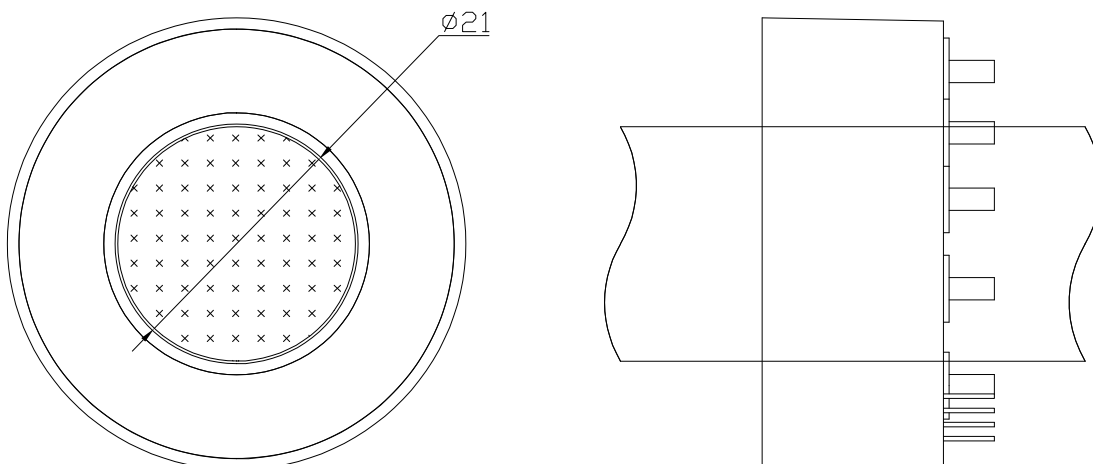

Appendix: Recommended applications of sensors

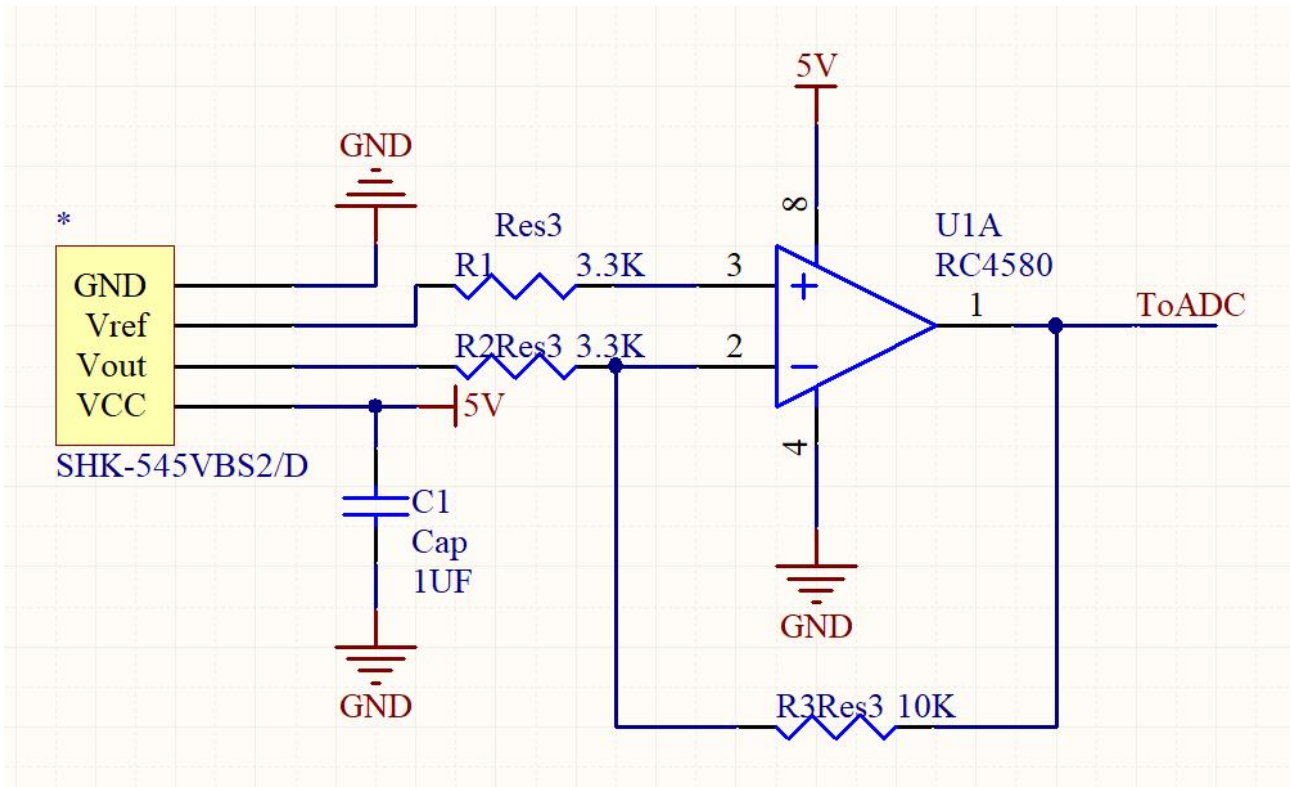

1. Supply voltage

Supply voltage U_c : $5V \pm 5\%$

The reference voltage: $2.5V \pm 0.02V$

Note: This version is the non-follow up version, and the output is independent of the supply voltage.