


Current Sensor

Product Series: SHK-VBS

Part number: SHK-VBS-TE-100-S2

Version: Ver 1.0

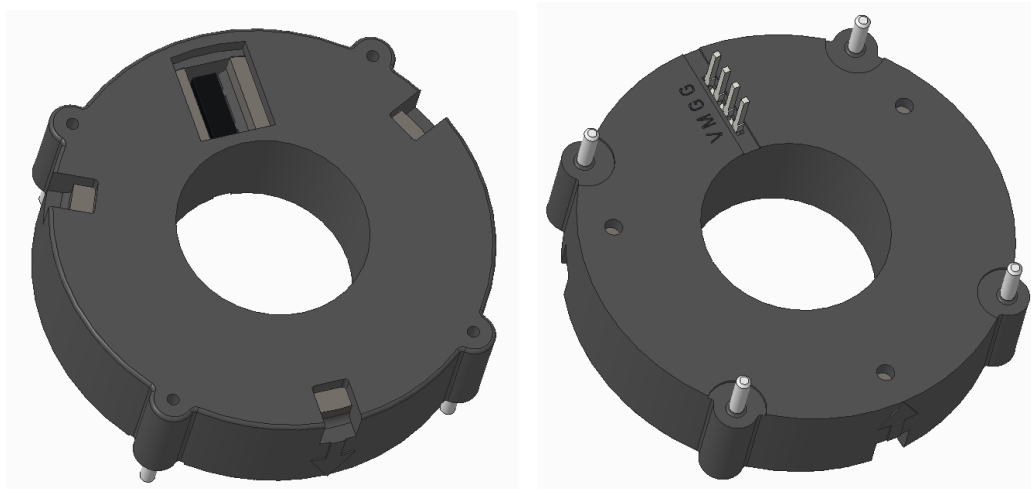

CONTENT

1.	Description	2
2.	Electrical data	3
3.	Dimension & Pin definitions.....	4

1. Description

The SHK-VBS-TE-100-S2 current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Electric welder power supply
- Inverter
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_a	°C	-40 ~ 125
Storage temperature	T_{stg}	°C	-40 ~ 125
Mass	m	g	14

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	-0.5 ~ 8 (Not operating)
			6.5
Electrostatic discharge voltage	$U_{ESD\ HBM}$	kV	4

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter


Parameter	Symbol	Unit	Value	Comment
Insulation voltage	U_d	kV	1.5	RMS voltage for AC test 50Hz-1 min, Leakage current less than 1mA
Insulation resistance	R_{INS}	MΩ	500	DC 500V, ISO 16750
Clearance distance (pri. -sec)	d_{Cl}	mm	1.5	Shortest distance through air
Creepage distance (pri. -sec)	d_{Cp}	mm	1.5	Shortest path along device body
Comparative tracking index	CTI		PLC 0	
Case material			V0 according to UL 94	PA66-GF30(Durethan AKV30FN04LT 904040)

2. Electrical data

Condition : $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary current measuring range	I_{PM}	A	-100		100	SHK-VBS-TE-100-S2
Supply voltage	V_{CC}	V	4.75	5	5.25	All
Current consumption	I_{CC}	mA		15		@ $V_{CC} = 5.0\text{ V}$
Output voltage	V_{OUT}	V	$(V_{CC}/5) \times (V_{off} + G \times I_{PM})$			@ $T_a = 25^\circ\text{C}$
Quiescent voltage	V_{off}	V		2.5		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Sensitivity	G	mV/A		20		SHK-VBS-TE-100-S2
Load resistance	R_L	k Ω	10			
Ratiometricity error	ϵ_r	%		± 0.5		@ $4.75\text{ V} \leq V_{CC} \leq 5.25\text{ V}$
Sensitivity error	ϵ_G	%		± 1		@ $T_a = 25^\circ\text{C}$
Electrical offset voltage error	V_{OE}	mV		± 4.0		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Magnetic offset voltage error	V_{OM}	mV		± 5.0		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Ave. Temp. coefficient of V_{OE}	TCV_{OEAV}	mV/ $^\circ\text{C}$	-0.15	± 0.1	0.15	@ $-40^\circ\text{C} < T_a < 125^\circ\text{C}$
Ave. Temp. coefficient of S	TCS_{AV}	%/ $^\circ\text{C}$		± 0.015		@ $-40^\circ\text{C} < T_a < 125^\circ\text{C}$
Linearity error	ϵ_L	% I_P	-1		1	
Response time	T_r	μs		4	6	@ 90% of I_{PM}
Frequency bandwidth (-3 dB)	BW	kHz	40			No RC circuit
Output voltage noise	V_{no}	mVpp		20		@ DC ~ 10 kHz

Overall accuracy X specification(mV)				
I _{PM} (A)	@Ta=25C°, VCC=5.0V		@-40C°≤Ta≤125C°, VCC=5.0V	
	-100	±20mV	±1%	±40mV
0	±10mV	±0.5%	±15mV	±0.75%
100	±20mV	±1%	±40mV	±2%

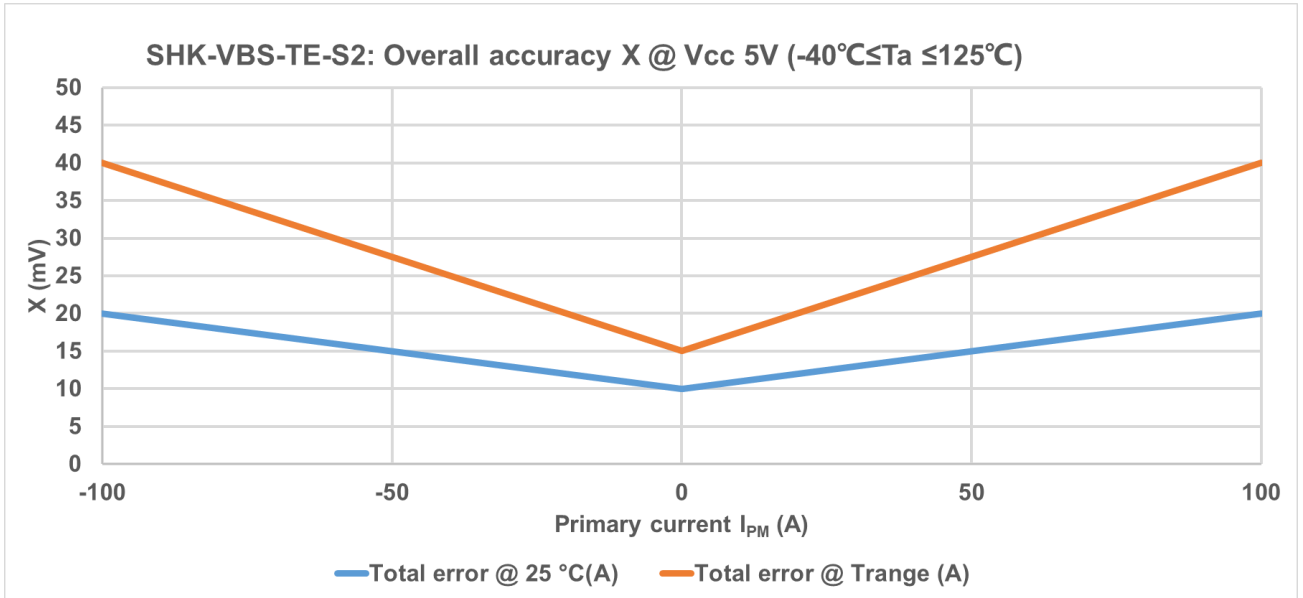

3. Dimension & Pin definitions

